

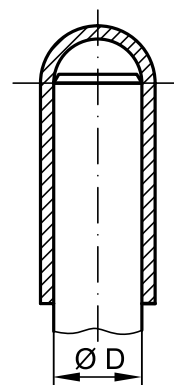

PROTECTIVE CAPS

GPN 255

Free test samples:

+49 4442 982-9100

poeppele.com/en/gpn255

**Standard colour:** Natural**Material:** SI**Higher temperature resistance.**

Extremely heat resistant up to 250°C. More details: page 125, "Physical properties".

**More robust.**

Highly tear-resistant material for increased demands.

**More versatile.**

Flexible material for accommodating larger tolerances.

**Better.**

Protection for studs and pipe ends.

Suitable for external

item	diameter D	(G)	Order no.
GPN 255 / 2	2	25.4	255 0020 0000
GPN 255 / 2.5	2.5	19	255 0025 0000
GPN 255 / 3	3	25.4	255 0030 0000
GPN 255 / 3.5	3.5	25.4	255 0035 0000
GPN 255 / 4	4	25.4	255 0040 0000
GPN 255 / 5	5	25.4	255 0050 0000
GPN 255 / 6	6	38.1	255 0060 0000
GPN 255 / 8	8	38.1	255 0080 0000
GPN 255 / 10	10	38.1	255 0100 0000
GPN 255 / 12	12	38.1	255 0120 0000
GPN 255 / 14	14	38.1	255 0140 0000
GPN 255 / 15	15	38.1	255 0150 0000
GPN 255 / 16	16	38.1	255 0160 0000
GPN 255 / 17	17	38.1	255 0170 0000
GPN 255 / 18	18	38.1	255 0180 0000
GPN 255 / 20	20	38.1	255 0200 0000
GPN 255 / 22	22	38.1	255 0220 0000
GPN 255 / 24	24	38.1	255 0240 0000
GPN 255 / 25	25	38.1	255 0250 0000
GPN 255 / 27	27	38.1	255 0270 0000
GPN 255 / 30	30	38.1	255 0300 0000
GPN 255 / 33	33	38.1	255 0330 0000
GPN 255 / 36	36	44.5	255 0360 0000
GPN 255 / 39	39	44.5	255 0390 0000
GPN 255 / 42	42	50.8	255 0420 0000
GPN 255 / 45	45	50.8	255 0450 0000
GPN 255 / 48	48	50.8	255 0480 0000
GPN 255 / 52	52	50.8	255 0520 0000

Size in mm

Flash and foreign particles are permitted for these items. We recommend that you carry out functional tests before series production.

For more information about the application of our items, please refer to pages 124/125.

You might also be interested in the following products: GPN 605, GPN 606, GPN 607