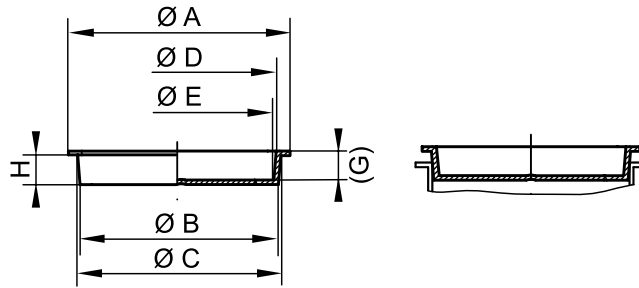


THIN WALLED TAPERED CLOSURES

GPN 601

Free test samples:

+49 4442 982-9100

poeppele.com/en/gpn601**Standard colour:** Red**Material:** PE-LD**Inner application****External application**

item	Inner application				External application			Order no.
	A	B	C	H	D	E	(G)	
GPN 601 D 728	79	68.7	71.2	13.5	69.6	67.2	13.5	601 0728 0000
GPN 601 D 1055*	110	103	105.5	16	104	102	17	601 1055 0000
GPN 601 D 1070	117	105	107	16	106	103.5	17.2	601 1070 0000
GPN 601 D 1090	117	107	109	17	108	106	19	601 1090 0000
GPN 601 D 1215	128	119.5	121.5	15.3	120	118	15.9	601 1215 0000
GPN 601 D 1230	130	120	123	23	121.5	118	24.4	601 1230 0000
GPN 601 D 1290	136	126	129	25	128	125	26.5	601 1290 0000
GPN 601 D 1306	136	128	130.6	23	129	127	24.2	601 1306 0000
GPN 601 D 1380	144	135	138	23	137	134	24.4	601 1380 0000

Size in mm

For information regarding materials, colours, drawings and the use of our items, please refer to pages 124/125.

*This size is supplied with bore hole.

You might also be interested in the following products: GPN 600, GPN 602**Saves time.**

Easy handling due to being a thinner walled version of the GPN 600.

**Lighter.**

Less material used during production.

**More versatile.**

Can be used universally as plug or cap. The tapered design is ideal for accommodating tolerances.

**Cleaner.**

Upon request, we can manufacture in the specially designed cleanroom in accordance with VDA Volume 19 and ISO 16232. For further information, please refer to page 129.

**Better.**

To close off bore holes and internal openings, or to protect studs and external threads.

**PÖPPELMANN****KAPSTO®**