


TAPERED CLOSURE WITH SIDE TAB

GPN 608

NEW

Watch the film now:
poeppelmann.com/en/gpn608

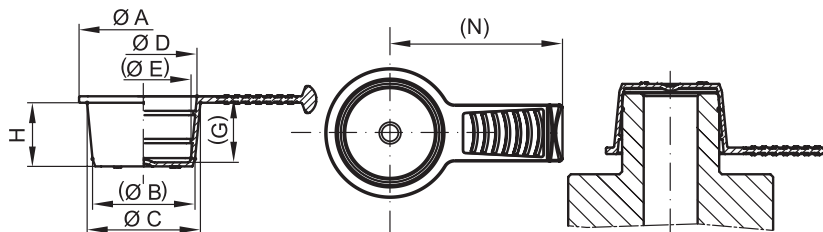

External application



Standard colour: Yellow
Material: PE-LD



Saves time.

Very quick disassembly thanks to an innovative lateral removal tab – protected tab design.



More versatile.

Can be used universally as plug or cap. The tapered design is ideal for accommodating tolerances.



Cleaner.

Upon request, we can manufacture in the specially designed cleanroom in accordance with VDA Volume 19 and ISO 16232. For further information, please refer to page 129.



Better.

To close off bore holes and internal threads, or to protect studs and external threads.

External application

item	External application								Order no.
	A	(B)	C	H	D	(E)	(G)	(N)	
608 BL 90	11	7	9	8.8	7.8	5.5	9.3	17.5	608 0090 0000
608 BL 100	12	8	10	8.8	8.8	6.4	9.3	18	608 0100 0000
608 BL 110	13	9	11	8.8	9.8	7.4	9.3	18.5	608 0110 0000
608 BL 120	14	10	12	9.8	10.7	8.4	10.1	19	608 0120 0000
608 BL 130	15	11	13	9.8	11.8	9.4	10.3	19.5	608 0130 0000
608 BL 140	16	12	14	10.8	12.7	10.5	11.3	20	608 0140 0000
608 BL 150	18	13	15	10.8	13.7	11.3	11.3	24	608 0150 0000
608 BL 160	19	14.1	15.9	10.8	14.7	12.3	11.2	24.5	608 0160 0000
608 BL 170	19.9	14.9	16.8	10.8	15.7	13.4	11.2	25	608 0170 0000
608 BL 180	20.9	16.1	17.8	10.8	16.7	14.4	11.2	25.5	608 0180 0000
608 BL 190	21.9	17.2	18.9	10.8	17.7	15.4	11.2	26	608 0190 0000
608 BL 200	22.9	18.1	19.9	11.8	18.7	16.4	12.2	31.5	608 0200 0000
608 BL 210	23.8	19.2	20.7	11.8	19.7	17.4	12.2	32	608 0210 0000
608 BL 220	25	20.3	22.1	11.8	20.7	18.1	12.2	32.5	608 0220 0000
608 BL 230	26	21	23	11.8	21.7	19.4	12.3	33	608 0230 0000
608 BL 240	27	22	24	11.8	22.7	20.4	12.3	33.5	608 0240 0000
608 BL 250	27.9	23.3	24.7	11.8	23.7	21.4	12.2	34	608 0250 0000
608 BL 260	28.9	24.2	25.7	11.8	24.7	22.4	12.2	34.5	608 0260 0000
608 BL 270	29.9	25.2	26.8	12.8	25.7	23.4	13.2	35	608 0270 0000
608 BL 280	31.9	26.1	27.9	12.8	26.7	24.4	13.2	36	608 0280 0000
608 BL 290	33.8	27.2	28.8	12.8	27.7	25.4	13.2	37	608 0290 0000
608 BL 300	35	28.4	30	12.8	28.6	26.2	13	37.5	608 0300 0000

Size in mm

For information regarding materials, colours, drawings and the use of our items, please refer to pages 124/125.



You might also be interested in the following products: **GPN 308, GPN 600, GPN 610, GPN 615**

TAPERED CLOSURE WITH SIDE TAB

GPN 608

NEW

Watch the film now:
poeppelmann.com/en/gpn608

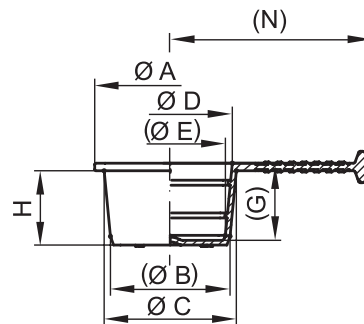

Inner application



Standard colour: Yellow

Material: PE-LD

Inner application

item	A	(B)	C	H	D	(E)	(G)	(N)	Order no.
608 BL 90	11	7	9	8.8	7.8	5.5	9.3	17.5	608 0090 0000
608 BL 100	12	8	10	8.8	8.8	6.4	9.3	18	608 0100 0000
608 BL 110	13	9	11	8.8	9.8	7.4	9.3	18.5	608 0110 0000
608 BL 120	14	10	12	9.8	10.7	8.4	10.1	19	608 0120 0000
608 BL 130	15	11	13	9.8	11.8	9.4	10.3	19.5	608 0130 0000
608 BL 140	16	12	14	10.8	12.7	10.5	11.3	20	608 0140 0000
608 BL 150	18	13	15	10.8	13.7	11.3	11.3	24	608 0150 0000
608 BL 160	19	14.1	15.9	10.8	14.7	12.3	11.2	24.5	608 0160 0000
608 BL 170	19.9	14.9	16.8	10.8	15.7	13.4	11.2	25	608 0170 0000
608 BL 180	20.9	16.1	17.8	10.8	16.7	14.4	11.2	25.5	608 0180 0000
608 BL 190	21.9	17.2	18.9	10.8	17.7	15.4	11.2	26	608 0190 0000
608 BL 200	22.9	18.1	19.9	11.8	18.7	16.4	12.2	31.5	608 0200 0000
608 BL 210	23.8	19.2	20.7	11.8	19.7	17.4	12.2	32	608 0210 0000
608 BL 220	25	20.3	22.1	11.8	20.7	18.1	12.2	32.5	608 0220 0000
608 BL 230	26	21	23	11.8	21.7	19.4	12.3	33	608 0230 0000
608 BL 240	27	22	24	11.8	22.7	20.4	12.3	33.5	608 0240 0000
608 BL 250	27.9	23.3	24.7	11.8	23.7	21.4	12.2	34	608 0250 0000
608 BL 260	28.9	24.2	25.7	11.8	24.7	22.4	12.2	34.5	608 0260 0000
608 BL 270	29.9	25.2	26.8	12.8	25.7	23.4	13.2	35	608 0270 0000
608 BL 280	31.9	26.1	27.9	12.8	26.7	24.4	13.2	36	608 0280 0000
608 BL 290	33.8	27.2	28.8	12.8	27.7	25.4	13.2	37	608 0290 0000
608 BL 300	35	28.4	30	12.8	28.6	26.2	13	37.5	608 0300 0000

Size in mm

For information regarding materials, colours, drawings and the use of our items, please refer to pages 124/125.

You might also be interested in the following products: **GPN 308, GPN 600, GPN 610, GPN 615**



Saves time.

Very quick disassembly thanks to an innovative lateral removal tab – protected tab design.



More versatile.

Can be used universally as plug or cap. The tapered design is ideal for accommodating tolerances.



Cleaner.

Upon request, we can manufacture in the specially designed cleanroom in accordance with VDA Volume 19 and ISO 16232. For further information, please refer to page 129.



Better.

To close off bore holes and internal threads, or to protect studs and external threads.