


FLANGE COVERS

GPN 670

Free test samples:

+49 4442 982-9100

poepelmann.com/en/gpn670

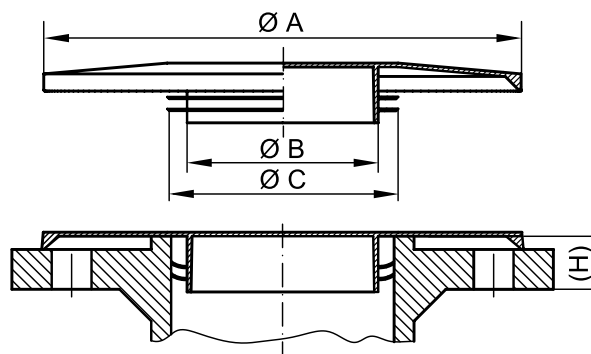

Standard colour: Yellow

Material: PE-LLD/PE-HD

**Better fit.**

Protection for flanges acc. to DIN EN 12351. Suitable for PN 10 through PN 400 and DN 10 through DN 250 acc. to DIN 2501 part 1, American National Standard ANSI B 16.5, British Standard BS 4504 and BS 1560. Also suitable for BASF Company Standard 14-150.

**More versatile.**

Larger tolerances accommodated by ribs.

**Better.**

Closes the opening and covers sealing face and internal threads. Prevents accidental dislodging. Also suitable for BASF-Werknorm 14-150.

Dimensions

item	A	B	C	(H)	Order no.
GPN 670 DN 10	86	7	14	14	670 0010 0000
GPN 670 DN 15	90	10	19	14	670 0015 0000
GPN 670 DN 20	100	14	24	14	670 0020 0000
GPN 670 DN 25	110	19	30	19	670 0025 0000
GPN 670 DN 32	136	25	39	19	670 0032 0000
GPN 670 DN 40	146	30	45	19	670 0040 0000
GPN 670 DN 50	160	40	56	19	670 0050 0000
GPN 670 DN 65	180	53	72	19	670 0065 0000
GPN 670 DN 80	196	65	85	24	670 0080 0000
GPN 670 DN 100	216	87	109	24	670 0100 0000
GPN 670 DN 125	246	106	134	24	670 0125 0000
GPN 670 DN 150	280	135	161	34	670 0150 0000
GPN 670 DN 200	345	185	209	34	670 0200 0000
GPN 670 DN 250	400	238	262	34	670 0250 0000

Size in mm

For information regarding materials, colours, drawings and the use of our items, please refer to pages 124/125.

Application Guide

Suitable for external		DIN 2627/28/29/38/BS 4504								ANSI B 16.5/BS 1560						item
Nominal width		PN 10-16	PN 25-40	PN 64	PN 100	PN 160	PN 250	PN 320	PN 400	Cl. 300	Cl. 400	Cl. 600	Cl. 900	Cl. 1500	Cl. 2500	
10	3/8	•	•	•	•	•	•	•	•	•	•	•	•	•	•	GPN 670 DN 10
15	1/2	•	•	•	•	•	•	•	•	•	•	•	•	•	•	GPN 670 DN 15
20	3/4	•	•	•	•	•	•	•	•	•	•	•	•	•	•	GPN 670 DN 20
25	1	•	•	•	•	•	•	•	•	•	•	•	•	•	•	GPN 670 DN 25
32	1 1/4	•	•	•	•	•	•	•	•	•	•	•	•	•	•	GPN 670 DN 32
40	1 1/2	•	•	•	•	•	•	•	•	•	•	•	•	•	•	GPN 670 DN 40
50	2	•	•	•	•	•	•	•	•	•	•	•	•	•	•	GPN 670 DN 50
65	2 1/2	•	•	•	•	•	•	•	•	•	•	•	•	•	•	GPN 670 DN 65
80	3	•	•	•	•	•	•	•	•	•	•	•	•	•	•	GPN 670 DN 80
100	4	•	•	•	•	•	•	•	•	•	•	•	•	•	•	GPN 670 DN 100
125	5	•	•	•	•	•	•	•	•	•	•	•	•	•	•	GPN 670 DN 125
150	6	•	•	•	•	•	•	•	•	•	•	•	•	•	•	GPN 670 DN 150
200	8	•	•	•	•	•	•	•	•	•	•	•	•	•	•	GPN 670 DN 200
250	10	•	•	•	•	•	•	•	•	•	•	•	•	•	•	GPN 670 DN 250

This application table is a guide only. We will be happy to send you free samples for testing. For apertures and bore holes without thread, please use dimensions B and C.

You might also be interested in the following products: GPN 650, GPN 655, GPN 680



PÖPPELMANN

KAPSTO®