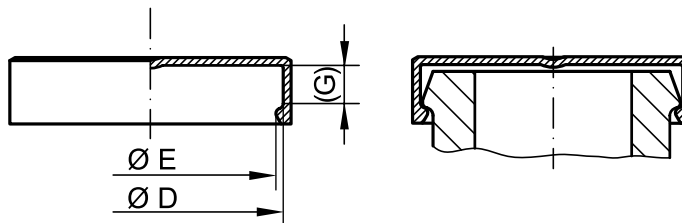


PROTECTIVE CAPS

GPN 690

Free test samples:

+49 4442 982-9100
poeppelelmann.com/en/gpn690**Standard colour:** Yellow**Material:** PE-LD; PE-LLD (from GPN 690/6006)**Better fit.**

Protection for SAE flange collars.

**Better.**

Also suitable for pipe ends and hose-fittings. A circumferential rim ensures firm fit and easy handling.

Dimensions

item	D	E	(G)	Order no.
GPN 690 / 3001	30.2	29.4	6.9	690 3001 0000
GPN 690 / 6001	31.7	30.9	7.9	690 6001 0000
GPN 690 / 3002	38.1	37.3	6.9	690 3002 0000
GPN 690 / 6002	41.3	40.5	8.9	690 6002 0000
GPN 690 / 3003	44.4	43.6	8.1	690 3003 0000
GPN 690 / 6003	47.4	46.4	9.5	690 6003 0000
GPN 690 / 3004	50.8	50	8.1	690 3004 0000
GPN 690 / 6004	54	53.2	10.4	690 6004 0000
GPN 690 / 3005	60.3	59.5	8.1	690 3005 0000
GPN 690 / 6005	63.5	62.5	12.7	690 6005 0000
GPN 690 / 3006	71.4	70.6	9.7	690 3006 0000
GPN 690 / 6006	79.4	78.6	12.7	690 6006 0000
GPN 690 / 0090	90.3	88.3	9	690 0090 0000
GPN 690 / 0106	106	104	10	690 0106 0000
GPN 690 / 0125	125	123	11	690 0125 0000
GPN 690 / 0150	150	148	12	690 0150 0000
GPN 690 / 0213	213	211	16	690 0213 0000

Size in mm

For information regarding materials, colours, drawings and the use of our items, please refer to pages 124/125.

Guide for the application with SAE flanges

Pressure level 3000 PSI (210 bar) Nominal width		item	Pressure level 6000 PSI (420 bar) Nominal width		item
12	1/2	GPN 690 / 3001	12	1/2	GPN 690 / 6001
20	3/4	GPN 690 / 3002	20	3/4	GPN 690 / 6002
25	1	GPN 690 / 3003	25	1	GPN 690 / 6003
32	1 1/4	GPN 690 / 3004	32	1 1/4	GPN 690 / 6004
40	1 1/2	GPN 690 / 3005	40	1 1/2	GPN 690 / 6005
50	2	GPN 690 / 3006	50	2	GPN 690 / 6006

This application table is a guide only. We would be happy to send you free samples for testing.

The adjacent versions have been specially developed to cover SAE flanges. Pressure ratings: 3000 PSI and 6000 PSI.

You might also be interested in the following product: GPN 640**PÖPPELMANN****KAPSTO®**