



## GPN 600

免费试样:

+49 4442 982-9100  
poepplmann.com/en/gpn600

外部应用

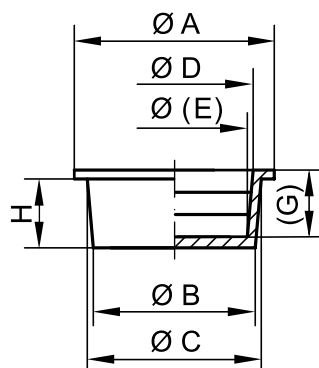

标准色: 天然色

材料: PE-LD; PE-LLD (GPN 600 B 915起)



## 更多用途。

可普遍用作防护塞或防护帽。锥形设计是适应公差的最佳之选。



## 更优质。

封闭钻孔和内螺纹, 或保护螺柱和外螺纹。

外部应用

产品名称	外部应用							订单编号
	A	B	C	H	D	E	(G)	
GPN 600 B 81	11	8.1	9.2	7.2	7.8	6.6	7	600 0081 0000
GPN 600 B 98	12	9.8	11	7.2	9.6	8.4	7	600 0098 0000
GPN 600 B 106	14	10.6	11.6	7	10	8.8	6.9	600 0106 0000
GPN 600 B 114	15	11.4	12.4	7	11.2	10	6.8	600 0114 0000
GPN 600 B 133	16	13.3	14.4	7	12.8	11.6	6.8	600 0133 0000
GPN 600 B 140	17	14	15.1	7.2	13.6	12.4	6.9	600 0140 0000
GPN 600 B 146	18	14.6	15.6	7.2	14.5	13.3	6.9	600 0146 0000
GPN 600 B 153	18	15.3	16.4	7	14.8	13.6	7	600 0153 0000
GPN 600 B 160	20	16	17.3	9	16.2	14.6	8.8	600 0160 0000
GPN 600 B 174	21	17.4	18.8	9.2	18	16.4	8.8	600 0174 0000
GPN 600 B 182	22	18.2	19.6	9	18.8	17.2	8.8	600 0182 0000
GPN 600 B 187	24	18.7	20	9.2	19	17.7	8.7	600 0187 0000
GPN 600 B 198	24	19.8	21.2	8.8	19.7	18.3	8.8	600 0198 0000
GPN 600 B 203	25	20.3	22.6	14	20.8	18.4	13.8	600 0203 0000
GPN 600 B 212	26	21.2	23.3	14.2	22	19.6	14	600 0212 0000
GPN 600 B 230	28	23	25	14	24	21.6	13.8	600 0230 0000
GPN 600 B 243	30	24.3	26.4	14	25	22.6	13.6	600 0243 0000
GPN 600 B 257	30	25.7	27.8	14.2	26.8	24.4	13.8	600 0257 0000
GPN 600 B 272	32	27.2	29.3	14	27	24.6	13.8	600 0272 0000
GPN 600 B 300	35	30	32	14	30.6	28.4	13.8	600 0300 0000
GPN 600 B 320	38	32	34	14	32	29.6	14	600 0320 0000
GPN 600 B 336	40	33.6	36	14	34	31.6	14	600 0336 0000
GPN 600 B 345	41	34.5	37	14	35	32.6	14	600 0345 0000
GPN 600 B 355	42	35.5	38.1	14	35.5	33.1	14	600 0355 0000
GPN 600 B 360	42	36.2	38.4	14	36	33.6	14	600 0360 0000
GPN 600 B 379	44	37.9	40	13.8	38	35.6	13.8	600 0379 0000
GPN 600 B 385	43	38.5	41	14	39.5	37.1	14	600 0385 0000
GPN 600 B 398	46	39.8	42	14	39.5	37.1	14	600 0398 0000
GPN 600 B 413	47	41.3	43.5	14	41.5	39.1	14	600 0413 0000
GPN 600 B 439	51.5	43.9	46	13.5	42	40.2	13.6	600 0439 0000
GPN 600 B 455	52	45.5	47.5	13.5	45	43	13.6	600 0455 0000
GPN 600 B 479	54	47.9	50	13.5	46.5	44.1	13.6	600 0479 0000
GPN 600 B 498	56	49.8	51.6	13.3	48.5	46.1	13.5	600 0498 0000
GPN 600 B 505	55	50.5	53.3	14	51.3	48.8	14.2	600 0505 0000
GPN 600 B 525	58	52.5	54.9	13.5	52.5	50.6	13.5	600 0525 0000
GPN 600 B 545	60	54.5	56.2	13.5	54	51.6	13.5	600 0545 0000
GPN 600 B 555	61	55.5	58	13.6	55	52.6	13.5	600 0555 0000
GPN 600 B 570	63	57	59	13.4	56.8	54.5	13.5	600 0570 0000
GPN 600 B 585	64	58.5	60.8	13.5	58	55.6	13.5	600 0585 0000
GPN 600 B 605	66	60.5	63	13.5	60	57.6	14	600 0605 0000
GPN 600 B 613	67	61.3	63.5	13	61	58.6	13.5	600 0613 0000
GPN 600 B 625	68	62.5	64.8	13.2	62	59.6	13.5	600 0625 0000
GPN 600 B 635	69	63.5	65.7	13	63	60.1	13.5	600 0635 0000
GPN 600 B 650	71	65	67.3	13	64.5	62.3	13.3	600 0650 0000
GPN 600 B 660	72	66	67.5	13	65	62.6	13	600 0660 0000
GPN 600 B 679	73	67.9	69.5	12.8	66	64.6	13.5	600 0679 0000
GPN 600 B 698	75	69.8	71.7	13	68	66	13.5	600 0698 0000
GPN 600 B 715	77	71.5	73.4	13	70	67.6	13	600 0715 0000
GPN 600 B 728	79	72.8	74	13	70	67.6	13.5	600 0728 0000
GPN 600 B 740	85	74	76.6	17	73	69.9	17	600 0740 0000
GPN 600 B 765	87	76.5	79	16.8	76.5	73.4	17.2	600 0765 0000
GPN 600 B 775	88	77.5	80	17	76	72.9	17.2	600 0775 0000

尺寸单位: 毫米

» 下转第29页



锥形封闭帽

## GPN 600

免费试样:

+49 4442 982-9100  
poepplmann.com/en/gpn600

保护帽

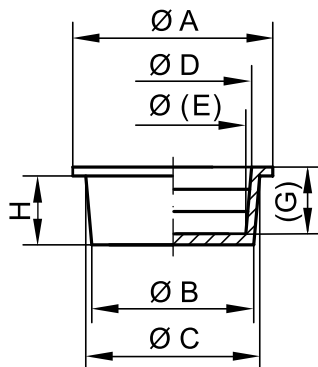

外部应用

» 下转第28页



标准色: 天然色

材料: PE-LD; PE-LLD (GPN 600 B 915起)



## 更多用途。

可普遍用作防护塞或防护帽。锥形设计是适应公差的最佳之选。



## 更优质。

封闭钻孔和内螺纹, 或保护螺柱和外螺纹。

产品材料、颜色、图纸和用途信息,  
请参阅第124/125页。您还可能对下列产品感兴趣: GPN 250, GPN 601,  
GPN 602, GPN 608

外部应用

产品名称	A	B	C	H	D	E	(G)	订单编号
GPN 600 B 790	90	79	82	17	78	75.4	17.2	600 0790 0000
GPN 600 B 815	92	81.5	83.6	16.5	80	76.9	17	600 0815 0000
GPN 600 B 820	89	82	86	23	83.9	79.7	23.5	600 0820 0000
GPN 600 B 840	95	84	87.1	16.5	83	79.9	17	600 0840 0000
GPN 600 B 865	97	86.5	89	17.5	86	82.9	18	600 0865 0000
GPN 600 B 890	100	89	91.5	17	89	86.5	17.5	600 0890 0000
GPN 600 B 915	102	91.5	94	17	92	88.9	17.5	600 0915 0000
GPN 600 B 940	105	94	96	17	92	90	17.5	600 0940 0000
GPN 600 B 965	107	96.5	99	17	96	92.9	17.5	600 0965 0000
GPN 600 B 990	110	99	102.5	17	99	95.9	17.5	600 0990 0000
GPN 600 B 1015	112	101.5	104	17	102	98.9	17.3	600 1015 0000
GPN 600 B 1040	115	104	106.5	17	104	100.9	17.5	600 1040 0000
GPN 600 B 1065	117	106.5	109	17	106	102.9	17.2	600 1065 0000
GPN 600 B 1090	120	109	111	17	108	105	17.5	600 1090 0000
GPN 600 B 1120	123	112	114.5	17	112.5	109.4	17	600 1120 0000
GPN 600 B 1140	125	114	117	16.6	114.5	111.4	17.2	600 1140 0000
GPN 600 B 1143	124.5	114.3	119.2	28	117.1	112.1	28.7	600 1143 0000
GPN 600 B 1190	130	119	123	23	120.2	116.1	23	600 1190 0000
GPN 600 B 1240	134	124	128	23	123	119.1	23	600 1240 0000
GPN 600 B 1275	137.6	127.5	130.6	23	127.6	123.6	22.5	600 1275 0000
GPN 600 B 1290	140	129	133	23	130.2	126.1	23.5	600 1290 0000
GPN 600 B 1330	143	134.5	137	23	133	129	22.5	600 1330 0000
GPN 600 B 1390	149	139	143	23	139	135	23	600 1390 0000
GPN 600 B 1468	159.5	146.8	152.6	33	149.9	144	33.5	600 1468 0000
GPN 600 B 1490	159	149	153	23	148	144.1	23.3	600 1490 0000
GPN 600 B 1535	163.6	153.5	157.5	23	153.6	149.6	23	600 1535 0000
GPN 600 B 1590	169	159	162	23	158	154	23	600 1590 0000
GPN 600 B 1600	170	160	164	23	160	156	23	600 1600 0000
GPN 600 B 1690	179	169	172	23	168	164	23	600 1690 0000
GPN 600 B 1740	184	174	177	23	173	169	22.5	600 1740 0000
GPN 600 B 1790	189	179	182	23	178	174	23	600 1790 0000
GPN 600 B 1815	192	181.5	184.5	23	180.5	176.5	23	600 1815 0000
GPN 600 B 1836	199.5	183.6	190.6	33	187.9	182	33.8	600 1836 0000
GPN 600 B 1990	209	199	202	22.5	198	194	22.5	600 1990 0000
GPN 600 B 2020	212	202	205	23	202.1	198.1	23	600 2020 0000
GPN 600 B 2030	213	203	205	23	202	199	23	600 2030 0000
GPN 600 B 2060	216	206	210.6	23.5	206	201.6	23.5	600 2060 0000
GPN 600 B 2180	235	218	222	22.5	217.4	213.5	22.5	600 2180 0000
GPN 600 B 2250*	242	225	229	23.5	225.4	221.3	23	600 2250 0000
GPN 600 B 2312	249.5	231.2	238.2	33	235.6	228.6	33.5	600 2312 0000
GPN 600 B 2490	267	249	252	22.5	248	244.1	22.5	600 2490 0000
GPN 600 B 2530	265	253	258	18	253	249.2	18	600 2530 0000
GPN 600 B 2934	314	293.4	300.2	32.5	296.7	289.8	33	600 2934 0000
GPN 600 B 2990	315	299	304	22.5	298	294.1	22.5	600 2990 0000
GPN 600 B 3080	326	308	313	21.8	308	303.4	21.8	600 3080 0000
GPN 600 B 3110	329	311	316	22	311	306.4	21.7	600 3110 0000
GPN 600 B 3380	358	338	343	22	338	333.4	21.8	600 3380 0000
GPN 600 B 3719*	399	371.9	381	32.5	377.7	368.4	32.8	600 3719 0000
GPN 600 B 3980	415	398	406	30	399	392.7	29.8	600 3980 0000
GPN 600 B 4350	455	435	443	30	437	430.7	30	600 4350 0000
GPN 600 B 4654	499	465.4	476.7	32	472.8	461.3	33	600 4654 0000
GPN 600 B 4840	506	484	491	30	486	479.7	30	600 4840 0000

尺寸单位: 毫米

» 有关户外使用的指导值, 请参见第30页



## 外部使用应用指导数据

## 公制螺纹

标准螺纹	细牙螺纹					管螺纹	产品名称
M 7							GPN 600 B 81
M 9	M 9 × 1						GPN 600 B 98
	M 10.5 × 1						GPN 600 B 114
M 12	M 12 × 1	M 12 × 1.5					GPN 600 B 133
	M 13 × 1	M 13 × 1.5					GPN 600 B 140
M 14	M 14 × 1	M 14 × 1.5					GPN 600 B 146
	M 15 × 1	M 15 × 1.5					GPN 600 B 160
	M 17 × 1						GPN 600 B 174
M 18	M 18 × 1	M 18 × 1.5	M 18 × 2				GPN 600 B 182
	M 19 × 1	M 19 × 1.5	M 19 × 2				GPN 600 B 203
						1/2	GPN 600 B 212
M 22	M 22 × 1	M 22 × 1.5	M 22 × 2				GPN 600 B 230
M 24	M 24 × 1	M 24 × 1.5	M 24 × 2				GPN 600 B 243
	M 25 × 1	M 25 × 1.5	M 25 × 2				GPN 600 B 257
	M 26 × 1	M 26 × 1.5	M 26 × 2				GPN 600 B 272
M 30	M 30 × 1	M 30 × 1.5	M 30 × 2	M 30 × 3		7/8	GPN 600 B 320
	M 32 × 1	M 32 × 1.5	M 32 × 2	M 32 × 3			GPN 600 B 336
M 33	M 33 × 1	M 33 × 1.5	M 33 × 2	M 33 × 3		1	GPN 600 B 345
	M 34 × 1	M 34 × 1.5	M 34 × 2	M 34 × 3			GPN 600 B 355
		M 35 × 1.5					GPN 600 B 360
	M 38 × 1	M 38 × 1.5	M 38 × 2	M 38 × 3		1 1/8	GPN 600 B 385
	M 38 × 1	M 38 × 1.5	M 38 × 2	M 38 × 3		1 1/8	GPN 600 B 398
	M 40 × 1	M 40 × 1.5	M 40 × 2	M 40 × 3			GPN 600 B 413
M 45	M 45 × 1	M 45 × 1.5	M 45 × 2	M 45 × 3	M 45 × 4		GPN 600 B 479
						1 1/2	GPN 600 B 498
	M 50 × 1	M 50 × 1.5	M 50 × 2	M 50 × 3	M 50 × 4		GPN 600 B 505
	M 50 × 1	M 50 × 1.5	M 50 × 2	M 50 × 3	M 50 × 4		GPN 600 B 525
						1 3/4	GPN 600 B 555
M 60	M 60 × 1	M 60 × 1.5	M 60 × 2	M 60 × 3	M 60 × 4	2	GPN 600 B 613
M 64	M 64 × 1	M 64 × 1.5	M 64 × 2	M 64 × 3	M 64 × 4		GPN 600 B 660
						2 1/4	GPN 600 B 679
	M 75 × 1	M 75 × 1.5	M 75 × 2	M 75 × 3	M 75 × 4	2 1/2	GPN 600 B 765
	M 78 × 1	M 78 × 1.5	M 78 × 2	M 78 × 3	M 78 × 4		GPN 600 B 815
						2 3/4	GPN 600 B 840
		M 90 × 1.5	M 90 × 2	M 90 × 3	M 90 × 4	M 90 × 6	GPN 600 B 915
		M 100 × 1.5	M 100 × 2	M 100 × 3	M 100 × 4	M 100 × 6	GPN 600 B 1015
		M 102 × 1.5	M 102 × 2	M 102 × 3	M 102 × 4		GPN 600 B 1040
		M 110 × 1.5	M 110 × 2	M 110 × 3	M 110 × 4	M 110 × 6	GPN 600 B 1120
		M 112 × 1.5	M 112 × 2	M 112 × 3	M 112 × 4		GPN 600 B 1140
		M 115 × 1.5	M 115 × 2	M 115 × 3	M 115 × 4	M 115 × 6	GPN 600 B 1143
		M 118 × 1.5	M 118 × 2	M 118 × 3	M 118 × 4		GPN 600 B 1190
		M 120 × 1.5	M 120 × 2	M 120 × 3	M 120 × 4	M 120 × 6	GPN 600 B 1240
		M 125 × 1.5	M 125 × 2	M 125 × 3	M 125 × 4	M 125 × 6	GPN 600 B 1275
		M 128 × 1.5	M 128 × 2	M 128 × 3	M 128 × 4		GPN 600 B 1290
		M 130 × 1.5	M 130 × 2	M 130 × 3	M 130 × 4	M 130 × 6	GPN 600 B 1330
		M 145 × 1.5	M 145 × 2	M 145 × 3	M 145 × 4	M 145 × 6	GPN 600 B 1468
		M 145 × 1.5	M 145 × 2	M 145 × 3	M 145 × 4	M 145 × 6	GPN 600 B 1490
		M 150 × 1.5	M 150 × 2	M 150 × 3	M 150 × 4	M 150 × 6	GPN 600 B 1535
		M 155 × 1.5	M 155 × 2	M 155 × 3	M 155 × 4	M 155 × 6	GPN 600 B 1590
		M 165 × 1.5	M 165 × 2	M 165 × 3	M 165 × 4	M 165 × 6	GPN 600 B 1690
		M 170 × 1.5	M 170 × 2	M 170 × 3	M 170 × 4	M 170 × 6	GPN 600 B 1740
		M 175 × 1.5	M 175 × 2	M 175 × 3	M 175 × 4	M 175 × 6	GPN 600 B 1790
		M 178 × 1.5	M 178 × 2	M 178 × 3			GPN 600 B 1815
		M 182 × 1.5	M 182 × 2	M 182 × 3	M 182 × 4		GPN 600 B 1836
		M 195 × 1.5	M 195 × 2	M 195 × 3	M 195 × 4	M 195 × 6	GPN 600 B 1990
		M 200 × 1.5	M 200 × 2	M 200 × 3	M 200 × 4	M 200 × 6	GPN 600 B 2020
		M 200 × 1.5	M 200 × 2	M 200 × 3	M 200 × 4	M 200 × 6	GPN 600 B 2030
		M 215 × 1.5	M 215 × 2	M 215 × 3	M 215 × 4	M 215 × 6	GPN 600 B 2180
		M 230 × 1.5	M 230 × 2	M 230 × 3	M 230 × 4	M 230 × 6	GPN 600 B 2312
		M 245 × 1.5	M 245 × 2	M 245 × 3	M 245 × 4	M 245 × 6	GPN 600 B 2490
		M 250 × 1.5	M 250 × 2		M 250 × 4	M 250 × 6	GPN 600 B 2530
		M 292 × 1.5	M 292 × 2		M 292 × 4		GPN 600 B 2934
		M 295 × 1.5	M 295 × 2		M 295 × 4	M 295 × 6	GPN 600 B 2990

« 尺寸请参见第28/29页



本应用表仅作参考之用。我们乐意为您寄送免费样品进行测试。对于螺栓、销钉和管端，请根据功能尺寸D和E进行选择。

产品材料、颜色、图纸和用途信息，请参阅第 124/125页。

您可能还对下列产品感兴趣: GPN 610, GPN 615, GPN 620

# GPN 600

免费试样:

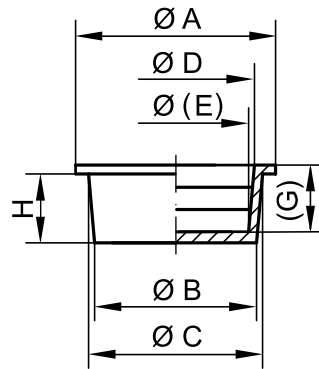+49 4442 982-9100  
poepelmann.com/en/gpn600

内部应用



标准色: 天然色

材料: PE-LD; PE-LLD (GPN 600 B 915起)

**更多用途。**

可普遍用作防护塞或防护帽。锥形设计是适应公差的最佳之选。

**更优质。**

隔离钻孔和内螺纹, 或保护螺柱和外螺纹。

内部应用

产品名称	内部应用							订单编号
	A	B	C	H	D	E	(G)	
GPN 600 B 81	11	8.1	9.2	7.2	7.8	6.6	7	600 0081 0000
GPN 600 B 98	12	9.8	11	7.2	9.6	8.4	7	600 0098 0000
GPN 600 B 106	14	10.6	11.6	7	10	8.8	6.9	600 0106 0000
GPN 600 B 114	15	11.4	12.4	7	11.2	10	6.8	600 0114 0000
GPN 600 B 133	16	13.3	14.4	7	12.8	11.6	6.8	600 0133 0000
GPN 600 B 140	17	14	15.1	7.2	13.6	12.4	6.9	600 0140 0000
GPN 600 B 146	18	14.6	15.6	7.2	14.5	13.3	6.9	600 0146 0000
GPN 600 B 153	18	15.3	16.4	7	14.8	13.6	7	600 0153 0000
GPN 600 B 160	20	16	17.3	9	16.2	14.6	8.8	600 0160 0000
GPN 600 B 174	21	17.4	18.8	9.2	18	16.4	8.8	600 0174 0000
GPN 600 B 182	22	18.2	19.6	9	18.8	17.2	8.8	600 0182 0000
GPN 600 B 187	24	18.7	20	9.2	19	17.7	8.7	600 0187 0000
GPN 600 B 198	24	19.8	21.2	8.8	19.7	18.3	8.8	600 0198 0000
GPN 600 B 203	25	20.3	22.6	14	20.8	18.4	13.8	600 0203 0000
GPN 600 B 212	26	21.2	23.3	14.2	22	19.6	14	600 0212 0000
GPN 600 B 230	28	23	25	14	24	21.6	13.8	600 0230 0000
GPN 600 B 243	30	24.3	26.4	14	25	22.6	13.6	600 0243 0000
GPN 600 B 257	30	25.7	27.8	14.2	26.8	24.4	13.8	600 0257 0000
GPN 600 B 272	32	27.2	29.3	14	27	24.6	13.8	600 0272 0000
GPN 600 B 300	35	30	32	14	30.6	28.4	13.8	600 0300 0000
GPN 600 B 320	38	32	34	14	32	29.6	14	600 0320 0000
GPN 600 B 336	40	33.6	36	14	34	31.6	14	600 0336 0000
GPN 600 B 345	41	34.5	37	14	35	32.6	14	600 0345 0000
GPN 600 B 355	42	35.5	38.1	14	35.5	33.1	14	600 0355 0000
GPN 600 B 360	42	36.2	38.4	14	36	33.6	14	600 0360 0000
GPN 600 B 379	44	37.9	40	13.8	38	35.6	13.8	600 0379 0000
GPN 600 B 385	43	38.5	41	14	39.5	37.1	14	600 0385 0000
GPN 600 B 398	46	39.8	42	14	39.5	37.1	14	600 0398 0000
GPN 600 B 413	47	41.3	43.5	14	41.5	39.1	14	600 0413 0000
GPN 600 B 439	51.5	43.9	46	13.5	42	40.2	13.6	600 0439 0000
GPN 600 B 455	52	45.5	47.5	13.5	45	43	13.6	600 0455 0000
GPN 600 B 479	54	47.9	50	13.5	46.5	44.1	13.6	600 0479 0000
GPN 600 B 498	56	49.8	51.6	13.3	48.5	46.1	13.5	600 0498 0000
GPN 600 B 505	55	50.5	53.3	14	51.3	48.8	14.2	600 0505 0000
GPN 600 B 525	58	52.5	54.9	13.5	52.5	50.6	13.5	600 0525 0000
GPN 600 B 545	60	54.5	56.2	13.5	54	51.6	13.5	600 0545 0000
GPN 600 B 555	61	55.5	58	13.6	55	52.6	13.5	600 0555 0000
GPN 600 B 570	63	57	59	13.4	56.8	54.5	13.5	600 0570 0000
GPN 600 B 585	64	58.5	60.8	13.5	58	55.6	13.5	600 0585 0000
GPN 600 B 605	66	60.5	63	13.5	60	57.6	14	600 0605 0000
GPN 600 B 613	67	61.3	63.5	13	61	58.6	13.5	600 0613 0000
GPN 600 B 625	68	62.5	64.8	13.2	62	59.6	13.5	600 0625 0000
GPN 600 B 635	69	63.5	65.7	13	63	60.1	13.5	600 0635 0000
GPN 600 B 650	71	65	67.3	13	64.5	62.3	13.3	600 0650 0000
GPN 600 B 660	72	66	67.5	13	65	62.6	13	600 0660 0000
GPN 600 B 679	73	67.9	69.5	12.8	66	64.6	13.5	600 0679 0000
GPN 600 B 698	75	69.8	71.7	13	68	66	13.5	600 0698 0000
GPN 600 B 715	77	71.5	73.4	13	70	67.6	13	600 0715 0000
GPN 600 B 728	79	72.8	74	13	70	67.6	13.5	600 0728 0000
GPN 600 B 740	85	74	76.6	17	73	69.9	17	600 0740 0000
GPN 600 B 765	87	76.5	79	16.8	76.5	73.4	17.2	600 0765 0000
GPN 600 B 775	88	77.5	80	17	76	72.9	17.2	600 0775 0000



尺寸单位: 毫米

» 下转第77页

锥形封闭帽

## GPN 600

免费试样:

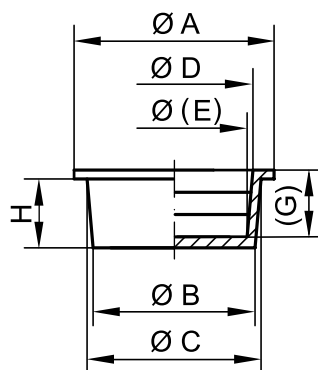+49 4442 982-9100  
poepelmann.com/en/gpn600

内部应用

« 上接第76页



标准色: 天然色

材料: PE-LD; PE-LLD (GPN 600 B 915起)



## 更多用途。

可普遍用作防护塞或防护帽。锥形设计是适应公差的理想之选。



## 更优质。

隔离钻孔和内螺纹, 或保护螺柱和外螺纹。

产品材料、颜色、图纸和用途信息,  
请参阅第124/125页。

## 内部应用

产品名称	内部应用							订单编号
	A	B	C	H	D	E	(G)	
GPN 600 B 790	90	79	82	17	78	75.4	17.2	600 0790 0000
GPN 600 B 815	92	81.5	83.6	16.5	80	76.9	17	600 0815 0000
GPN 600 B 820	89	82	86	23	83.9	79.7	23.5	600 0820 0000
GPN 600 B 840	95	84	87.1	16.5	83	79.9	17	600 0840 0000
GPN 600 B 865	97	86.5	89	17.5	86	82.9	18	600 0865 0000
GPN 600 B 890	100	89	91.5	17	89	86.5	17.5	600 0890 0000
GPN 600 B 915	102	91.5	94	17	92	88.9	17.5	600 0915 0000
GPN 600 B 940	105	94	96	17	92	90	17.5	600 0940 0000
GPN 600 B 965	107	96.5	99	17	96	92.9	17.5	600 0965 0000
GPN 600 B 990	110	99	102.5	17	99	95.9	17.5	600 0990 0000
GPN 600 B 1015	112	101.5	104	17	102	98.9	17.3	600 1015 0000
GPN 600 B 1040	115	104	106.5	17	104	100.9	17.5	600 1040 0000
GPN 600 B 1065	117	106.5	109	17	106	102.9	17.2	600 1065 0000
GPN 600 B 1090	120	109	111	17	108	105	17.5	600 1090 0000
GPN 600 B 1120	123	112	114.5	17	112.5	109.4	17	600 1120 0000
GPN 600 B 1140	125	114	117	16.6	114.5	111.4	17.2	600 1140 0000
GPN 600 B 1143	124.5	114.3	119.2	28	117.1	112.1	28.7	600 1143 0000
GPN 600 B 1190	130	119	123	23	120.2	116.1	23	600 1190 0000
GPN 600 B 1240	134	124	128	23	123	119.1	23	600 1240 0000
GPN 600 B 1275	137.6	127.5	130.6	23	127.6	123.6	22.5	600 1275 0000
GPN 600 B 1290	140	129	133	23	130.2	126.1	23.5	600 1290 0000
GPN 600 B 1330	143	134.5	137	23	133	129	22.5	600 1330 0000
GPN 600 B 1390	149	139	143	23	139	135	23	600 1390 0000
GPN 600 B 1468	159.5	146.8	152.6	33	149.9	144	33.5	600 1468 0000
GPN 600 B 1490	159	149	153	23	148	144.1	23.3	600 1490 0000
GPN 600 B 1535	163.6	153.5	157.5	23	153.6	149.6	23	600 1535 0000
GPN 600 B 1590	169	159	162	23	158	154	23	600 1590 0000
GPN 600 B 1600	170	160	164	23	160	156	23	600 1600 0000
GPN 600 B 1690	179	169	172	23	168	164	23	600 1690 0000
GPN 600 B 1740	184	174	177	23	173	169	22.5	600 1740 0000
GPN 600 B 1790	189	179	182	23	178	174	23	600 1790 0000
GPN 600 B 1815	192	181.5	184.5	23	180.5	176.5	23	600 1815 0000
GPN 600 B 1836	199.5	183.6	190.6	33	187.9	182	33.8	600 1836 0000
GPN 600 B 1990	209	199	202	22.5	198	194	22.5	600 1990 0000
GPN 600 B 2020	212	202	205	23	202.1	198.1	23	600 2020 0000
GPN 600 B 2030	213	203	205	23	202	199	23	600 2030 0000
GPN 600 B 2060	216	206	210.6	23.5	206	201.6	23.5	600 2060 0000
GPN 600 B 2180	235	218	222	22.5	217.4	213.5	22.5	600 2180 0000
GPN 600 B 2250*	242	225	229	23.5	225.4	221.3	23	600 2250 0000
GPN 600 B 2312	249.5	231.2	238.2	33	235.6	228.6	33.5	600 2312 0000
GPN 600 B 2490	267	249	252	22.5	248	244.1	22.5	600 2490 0000
GPN 600 B 2530	265	253	258	18	253	249.2	18	600 2530 0000
GPN 600 B 2934	314	293.4	300.2	32.5	296.7	289.8	33	600 2934 0000
GPN 600 B 2990	315	299	304	22.5	298	294.1	22.5	600 2990 0000
GPN 600 B 3080	326	308	313	21.8	308	303.4	21.8	600 3080 0000
GPN 600 B 3110	329	311	316	22	311	306.4	21.7	600 3110 0000
GPN 600 B 3380	358	338	343	22	338	333.4	21.8	600 3380 0000
GPN 600 B 3719*	399	371.9	381	32.5	377.7	368.4	32.8	600 3719 0000
GPN 600 B 3980	415	398	406	30	399	392.7	29.8	600 3980 0000
GPN 600 B 4350	455	435	443	30	437	430.7	30	600 4350 0000
GPN 600 B 4654	499	465.4	476.7	32	472.8	461.3	33	600 4654 0000
GPN 600 B 4840	506	484	491	30	486	479.7	30	600 4840 0000

尺寸单位: 毫米

» 有关内部使用的指导值, 请参见第78页

\*该系列尺寸配孔。

# GPN 600

免费试样:

+49 4442 982-9100  
poeppele.com/en/gpn600

## 内部使用应用指导数据

## 公制螺纹

标准螺纹	细牙螺纹				管螺纹	产品名称
M 10	M 10 × 1				1/8	GPN 600 B 81
M 12		M 12 × 1.5				GPN 600 B 98
	M 12 × 1					GPN 600 B 106
M 14					1/4	GPN 600 B 114
M 16	M 15 × 1					GPN 600 B 133
						GPN 600 B 140
M 18					3/8	GPN 600 B 146
	M 17 × 1	M 18 × 2				GPN 600 B 153
						GPN 600 B 160
		M 20 × 1.5	M 20 × 2			GPN 600 B 174
	M 20 × 1				1/2	GPN 600 B 182
M 22						GPN 600 B 187
M 24		M 22 × 1.5			5/8	GPN 600 B 198
			M 24 × 2			GPN 600 B 203
		M 24 × 1.5				GPN 600 B 212
M 27		M 26 × 1.5	M 26 × 2		3/4	GPN 600 B 230
	M 27 × 1	M 27 × 1.5	M 28 × 2			GPN 600 B 243
M 30	M 28 × 1	M 28 × 1.5		M 30 × 3		GPN 600 B 257
		M 30 × 1.5	M 30 × 2	M 32 × 3	7/8	GPN 600 B 272
	M 32 × 1	M 33 × 1.5	M 33 × 2	M 34 × 3		GPN 600 B 300
	M 34 × 1	M 35 × 1.5	M 35 × 2	M 36 × 3		GPN 600 B 320
M 39	M 36 × 1	M 36 × 1.5	M 37 × 2	M 38 × 3	1 1/8	GPN 600 B 336
	M 37 × 1	M 37 × 1.5	M 38 × 2	M 39 × 3		GPN 600 B 345
M 42	M 38 × 1	M 38 × 1.5	M 39 × 2	M 40 × 3		GPN 600 B 355
M 42		M 39 × 1.5	M 39 × 2		M 42 × 4	GPN 600 B 360
	M 40 × 1	M 40 × 1.5	M 42 × 2	M 42 × 3		GPN 600 B 379
M 45		M 42 × 1.5			1 1/4	GPN 600 B 385
	M 42 × 1		M 45 × 3	M 45 × 4		GPN 600 B 398
M 48			M 45 × 2		1 3/8	GPN 600 B 413
				M 48 × 3	1 1/2	GPN 600 B 439
M 52	M 48 × 1	M 48 × 1.5		M 50 × 3		GPN 600 B 455
	M 50 × 1	M 50 × 1.5		M 52 × 3	1 3/4	GPN 600 B 479
	M 52 × 1					GPN 600 B 498
				M 55 × 3		GPN 600 B 505
M 60	M 55 × 1	M 55 × 1.5	M 56 × 2			GPN 600 B 525
				M 55 × 4		GPN 600 B 545
				M 56 × 4		GPN 600 B 555
				M 58 × 4	2	GPN 600 B 570
	M 58 × 1	M 58 × 1.5		M 60 × 3		GPN 600 B 585
		M 60 × 1.5	M 60 × 2			GPN 600 B 585
			M 62 × 2			GPN 600 B 605
M 68			M 64 × 2	M 65 × 3		GPN 600 B 613
		M 64 × 1.5	M 65 × 2		2 1/4	GPN 600 B 625
	M 64 × 1					GPN 600 B 635
				M 64 × 4		GPN 600 B 650
				M 68 × 4		GPN 600 B 679
			M 68 × 3			GPN 600 B 715
			M 68 × 2			GPN 600 B 728
				M 72 × 3		GPN 600 B 740
			M 75 × 2		2 1/2	GPN 600 B 765
			M 76 × 2			GPN 600 B 775
				M 80 × 6		GPN 600 B 790
				M 80 × 4		GPN 600 B 815
			M 80 × 2		2 3/4	GPN 600 B 820
						GPN 600 B 840
				M 85 × 6		GPN 600 B 865
				M 85 × 4		GPN 600 B 890
			M 85 × 2		3	GPN 600 B 915
				M 90 × 4		GPN 600 B 940
				M 90 × 6		GPN 600 B 965
			M 90 × 2		3 1/4	GPN 600 B 990
				M 95 × 6		GPN 600 B 1015
			M 95 × 2			GPN 600 B 1040
				M 100 × 4		
			M 100 × 2		3 1/2	
				M 105 × 4		
			M 105 × 2			
				M 110 × 4		

« 尺寸请参见第76/77页

» 下转第79页



« 上接第78页

## 公制螺纹

标准螺纹	细牙螺纹	管螺纹	产品名称
	M 110 × 2	M 115 × 6	GPN 600 B 1065
		M 115 × 4	GPN 600 B 1090
	M 115 × 2	M 120 × 6	GPN 600 B 1120
		M 120 × 4	GPN 600 B 1140
	M 120 × 2	M 125 × 6	GPN 600 B 1143
		M 125 × 4	GPN 600 B 1190
		M 130 × 4	GPN 600 B 1240
		M 135 × 6	GPN 600 B 1275
		M 140 × 4	GPN 600 B 1330
		M 155 × 6	GPN 600 B 1468
	M 155 × 3		GPN 600 B 1490
	M 160 × 3		GPN 600 B 1535
			GPN 600 B 1590
	M 165 × 3	M 170 × 6	GPN 600 B 1600
		M 190 × 6	GPN 600 B 1815
	M 190 × 3	M 195 × 6	GPN 600 B 1836
		M 210 × 6	GPN 600 B 2020

本应用表仅作参考之用。我们乐意为您寄送免费样品进行测试。不带螺纹的孔隙和钻孔，请使用尺寸B和C。

产品材料、颜色、图纸和用途信息，请参阅第 124/125 页。

您可能还对下列产品感兴趣: [GPN 602](#), [GPN 608](#), [GPN 610](#)